


afdichtborstel 180° profiel

Borstels Blaton
Blaton & Bouckaert bv
Tieltstraat 87
8760 Meulebeke
BE0458339549

tel. +32 (0) 51 48 80 39

info@borstelsblaton.be

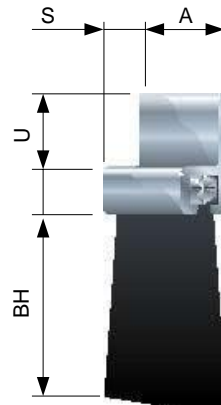

Superseal is manufactured in hardwearing nylon filament fitted with a durable mill finish aluminium carrier.

Features

- Eight nominal section sizes
- 2m, 2.5m and 3m standard lengths
- Brush heights up to 213mm
- Modified lengths, brush heights and finishes available on request

Light duty

Type	Carrier dimensions			Brush height BH	Fill material	Part number
	S	T	U			3m length
M	3.70	4.00	9.50	10.00	Nylon black 0.10	H610MF3013
				15.00	Nylon black 0.15	H610MF3018
A	5.20	5.60	11.10	10.00	Nylon black 0.15	H610AF3014
				15.00	Nylon black 0.15	H610AF3019
B	6.50	6.70	10.80	13.50	Nylon black 0.15	H610BF3019
				19.00	Nylon black 0.15	H610BF3025
				26.00	Nylon black 0.15	H610BF3032
				38.00	Nylon black 0.15	H610BF3044

Medium duty

Type	Carrier dimensions			Brush height BH	Fill material	Part number
	S	T	U			3m length
C	7.70	8.40	10.60	15.00	Nylon black 0.15	H610CF3022
				25.00	Nylon black 0.15	H610CF3032
				35.00	Nylon black 0.20	H610CF3042
				50.00	Nylon black 0.20	H610CF3057
D	10.00	10.80	17.30	12.00	Nylon black 0.20	H610DF3019
				19.00	Nylon black 0.20	H610DF3025
				26.00	Nylon black 0.20	H610DF3032
				30.00	Nylon black 0.20	H610DF3038
				40.00	Nylon black 0.20	H610DF3048
				49.00	Nylon black 0.20	H610DF3057
E	10.50	11.80	18.20	75.00	Nylon black 0.30	H610DF3083
				41.00	Nylon black 0.30	H610EF3051
				50.00	Nylon black 0.30	H610EF3060
				66.00	Nylon black 0.30	H610EF3076
				75.00	Nylon black 0.30	H610EF3085
				100.00	Nylon black 0.40	H610EF3110

afdichtborstel 180° profiel

Heavy duty

Type	Carrier dimensions			Brush height	Fill material	Part number
	S	T	U	BH		3m length
G	13.50	14.50	19.50	45.00	Nylon black 0.50	H610GF3057
				64.00	Nylon black 0.30	H610GF3076
				102.00	Nylon black 0.50	H610GF3114
				150.00	Nylon black 0.50	H610GF3162
H	17.90	18.10	50.00	213.00	Nylon black 0.90	H610HF3229

All dimension are in mm

How to specify

Select required brush height (BH) and thickness according to the size of gap to be sealed.

For modified products, select the standard part number and specify:

- ▶ Modified length (A)
- ▶ Brush height (BH)

Technical notes


Cutting to length

Superseal should be removed from the aluminium carrier and cut to length with side action croppers to ensure the ends are completely resealed and avoid spillage of the filaments.

Aluminium carriers should be cut with a fine tooth saw and deburred. File a lead-in at one end of the carrier to aid assembly of the brushstrip.

Fitting

Superseal products should be fitted with the tips of the filaments in firm contact with the mating surface but barely flexed. Fixings should be positioned within 50mm of each end and at 300mm centres thereafter.

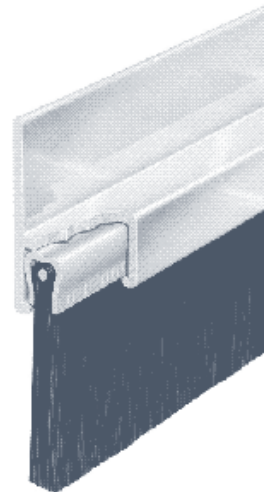

Superseal brushstrip is also available in a range of aluminum carriers

Borstels Blaton
Blaton & Bouckaert bv
Tieltstraat 87
8760 Meulebeke
BE0458339549

tel. +32 (0) 51 48 80 39

info@borstelsblaton.be