


afdichtborstel 90° profiel

Borstels Blaton
Blaton & Bouckaert bv
Tieltstraat 87
8760 Meulebeke
BE0458339549

tel. +32 (0) 51 48 80 39

info@borstelsblaton.be

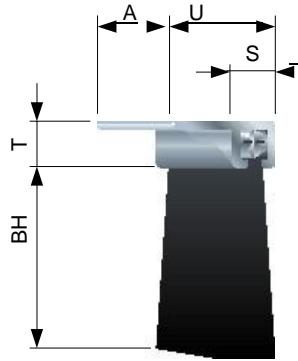

Superseal is manufactured in hardwearing nylon filament fitted with a durable mill finish aluminium carrier.

Features

- Eight nominal section sizes
- 2m, 2.5m and 3m standard lengths
- Brush heights up to 213mm
- Modified lengths, brush heights and finishes available on request

Light duty

Type	Carrier dimensions			Brush height	Fill material	Part number
	S	T	U	BH		3m length
M	3.70	4.00	13.00	10.00	Nylon black 0.10	H610MT3013
				15.00	Nylon black 0.15	H610MT3018
A	5.20	5.60	14.00	10.00	Nylon black 0.15	H610AT3014
				15.00	Nylon black 0.15	H610AT3019
B	6.50	6.70	17.50	13.50	Nylon black 0.15	H610BT3019
				19.00	Nylon black 0.15	H610BT3025
				26.00	Nylon black 0.15	H610BT3032
				38.00	Nylon black 0.15	H610BT3044

Medium duty

Type	Carrier dimensions			Brush height	Fill material	Part number
	S	T	U	BH		3m length
C	7.70	8.40	22.00	15.00	Nylon black 0.15	H610CT3022
				25.00	Nylon black 0.15	H610CT3032
				35.00	Nylon black 0.20	H610CT3042
				50.00	Nylon black 0.20	H610CT3057
D	10.00	10.80	27.00	12.00	Nylon black 0.20	H610DT3019
				19.00	Nylon black 0.20	H610DT3025
				26.00	Nylon black 0.20	H610DT3032
				30.00	Nylon black 0.20	H610DT3038
				40.00	Nylon black 0.20	H610DT3048
				49.00	Nylon black 0.20	H610DT3057
E	10.50	11.80	29.00	75.00	Nylon black 0.30	H610DT3083
				41.00	Nylon black 0.30	H610ET3051
				50.00	Nylon black 0.30	H610ET3060
				66.00	Nylon black 0.30	H610ET3076
				75.00	Nylon black 0.30	H610ET3085
				100.00	Nylon black 0.40	H610ET3110

afdichtborstel 90° profiel

Heavy duty

Type	Carrier dimensions			Brush height	Fill material	Part number
	S	T	U	BH		3m length
G	13.50	14.50	35.00	45.00	Nylon black 0.50	H610GT3057
				64.00	Nylon black 0.30	H610GT3076
				102.00	Nylon black 0.50	H610GT3114
				150.00	Nylon black 0.50	H610GT3162
H	17.90	18.10	68.00	213.00	Nylon black 0.90	H610HT3229

All dimensions are in mm

How to specify

Select required brush height (BH) and thickness according to the size of gap to be sealed.

For modified products, select the standard part number and specify:

- ▶ Modified length (A)
- ▶ Brush height (BH)

Technical notes


Cutting to length

Superseal should be removed from the aluminium carrier and cut to length with side action croppers to ensure the ends are completely resealed and avoid spillage of the filaments.

Aluminium carriers should be cut with a fine tooth saw and deburred. File a lead-in at one end of the carrier to aid assembly of the brushstrip.

Fitting

Superseal products should be fitted with the tips of the filaments in firm contact with the mating surface but barely flexed. Fixings should be positioned within 50mm of each end and at 300mm centres thereafter.

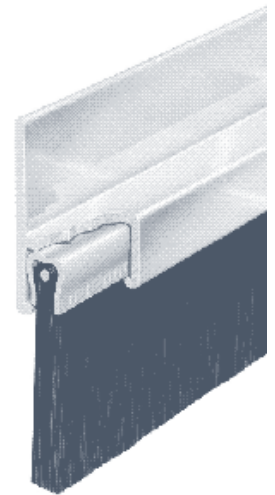

Superseal brushstrip is available in either 180°, 45° or 90° aluminum carriers

Borstels Blaton
Blaton & Bouckaert bv
Tieltstraat 87
8760 Meulebeke
BE0458339549

tel. +32 (0) 51 48 80 39

info@borstelsblaton.be